

BELTRONICS®
—PERFORMANCE RULES.™

BELTRONICS®
—PERFORMANCE RULES.™

S T E A L T H I N S T A L L E D

STi_R

BELTRONICS
5442 West Chester Road
West Chester OH
45069 USA

USA 800-341-2288
www.beltronics.com

©2007 BELTRONICS
Made in Canada

Features, specifications and prices subject to change without notice.

Model: STi-R

D I G I T A L R A D A R • L A S E R • S A F E T Y D E T E C T O R

Owner's Manual

The BELTRONICS STi-R is the most advanced stealth-installed radar, laser and safety detector ever designed.

The STi-R includes full X, K, SuperWide Ka, and Safety Warning System radar capability, front laser detection, dual LNA (low noise amplifier) microwave receivers, digital signal processing (DSP) for superior range and reduced false alarms, our patented Mute and AutoMute, audible and visual band alerts, and all the performance you'd expect from BELTRONICS.

In addition, the BELTRONICS STi-R contains the following revolutionary features:

- Dual LNA (low noise amplifier) receivers provide the longest possible warning against all radar threats.
- TotalShield* RF Technology provides the ultimate in undetectability.
- High and low voltage warning is given any time the vehicle's voltage drops below 10.5 volts, or goes above 16.5 volts.

- Easy-to-use Programming lets you customize up to 7 features.
- Exclusive AutoScan mode intelligently reduces unwanted false alarms.
- Ultra-bright text-display provides easy to read information from any angle.
- Tech Display provides actual numeric radar frequency for any radar signal.
- Programmable Bands (on/off).
- Detects and decodes up to 64 Safety Warning System messages

If you've used a radar detector before, a review of the Quick Reference Guide on pages 4 and 5, and the Programming information on pages 12 and 13 will briefly explain the new features.

If this is your first detector, please read the manual in detail to get the most out of your BELTRONICS STi-R's outstanding performance and innovative features.

Please drive safely.

FCC Note: Modifications not expressly approved by the manufacturer could void the user's FCC granted authority to operate the equipment.



▼ Remove card along perforations ▼

BELTRONICS STi-R Quick Reference Card

There are 7 user-selectable options so you can customize your STi-R for your own preferences.

The buttons labeled VOL/MUTE and SENS are also used to enter the Programming Mode, REVIEW your current program settings, and to CHANGE any settings as desired. The abbreviations PGM, RVW and CHG are located on the lower part of the display lens and are highlighted in graphics.

How to use Programming

1 To enter Program Mode, press and hold both VOL/MUTE and SENS buttons down for 2 seconds. The unit will beep twice, and display the word **Program**.

2 Then press the VOL/MUTE button to review the current settings. You can either tap the button to change from item to item, or hold the button to scroll through the items.

3 Press the SENS button to change any setting. You can either tap the button to change from setting to setting, or hold the button to scroll through all the options.

4 To leave Program Mode, simply wait 8 seconds without pressing any button, or momentarily press the PWR button. The unit will display **Complete**, beep 4 times, and return to normal operation.

Factory Default Settings

To reset the STi-R to its original factory settings, press and hold the "VOL/MUTE" and "SENS" buttons while turning the power on. The STi-R's display will provide a **Reset** message, accompanied by an audible alert acknowledging the reset.

An example

Here is how you would turn the STi-R's AutoMute feature off.

1 Enter the Program Mode by holding both the VOL/MUTE and SENS buttons down for 2 seconds. *The STi-R will beep twice and display **Program**.*

2 Then hold the VOL/MUTE button down. *The STi-R will scroll through the categories, starting with power-on indication (**Pilot**), Voice, Power-on sequence, signal strength meter, and then AutoMute.*

3 Release the VOL/MUTE button when the STi-R shows the AutoMute item. *Since the factory setting is for AutoMute to be on, the STi-R will display **aMute ON**.*

*If you accidentally don't release the Review button in time, and the STi-R goes to the next category, hold the VOL/MUTE button down again, and scroll through the categories again until **aMute** is displayed.*

4 Press the SENS button to change from **aMute ON** to **aMute OFF**.

5 To complete the Programming, simply wait 8 seconds without pressing any button, or press the PWR button. *The STi-R will display **Complete**, beep 4 times, and return to normal operation.*

▶ Remove card along perforations ▶



▼ Remove card along perforations ▼

BELTRONICS STi-R Quick Reference Card

Press the VOL/MUTE button to go from one category to the next

Press the SENS button to change your setting within a category

PILOT (Power-on indication)	Pilot Pilot Pilot	HWY H U	* Full word: Highway, AutoScan, etc. Letter: H, A, C, or Cnx Vehicle voltage
VOICE	Voice Voice	ON OFF	* Voice alerts on Voice alerts off
POWER-ON SEQUENCE	PwrOn PwrOn	STD FST	* Standard power-on sequence Fast power-on sequence
SIGNAL STRENGTH METER	Meter Meter Meter	STD THT TEC	* Standard signal strength meter Threat Display Tech Display
AUTOMUTE	aMute aMute	ON OFF	* AutoMute on AutoMute off
BRIGHTNESS	Brt Brt Brt Brt Brt	Auto Min Med Max Dark	* Automatic brightness Minimum brightness Medium brightness Maximum brightness All dark
BANDS	Bands Bands	DFT MOD	* Factory default settings Factory default settings modified

▼ Remove card along perforations ▼

When KaSW is off, each Ka segment can be turned on or off

Ka1 (33.392 - 33.704)	ON or OFF	Turn bands "ON" or "OFF" by pressing and holding the "SENS" button
Ka2 (33.704 - 33.896)	ON or OFF	
Ka3 (33.886 - 34.198)	ON or OFF	
Ka4 (34.184 - 34.592)	ON or OFF	
Ka5 (34.592 - 34.808)	ON or OFF	
Ka6 (34.806 - 35.166)	ON or OFF	
Ka7 (34.143 - 35.383)	ON or OFF	
Ka8 (35.378 - 35.618)	ON or OFF	
Ka9 (35.595 - 35.835)	ON or OFF	
Ka10 (35.830 - 35.998)	ON or OFF	
	X	ON or OFF (default is on)
	K	ON or OFF (default is on)
	KaSW	ON or OFF (default is on)
	LSR	ON or OFF (default is on)
	SWS	ON or OFF (default is off)
	POP	ON or OFF (default is off)
	RDR	ON or OFF (default is on)

* Factory Default Settings

Quick Reference Card Quick Reference Guide Controls and Features

- Power
- Volume Control
- Power-on Indication
- Voice Alerts
- AutoMute
- Mute
- Sensitivity Button
- Brightness
- Audible Alerts
- Signal Strength Meter
- Threat Display
- Tech Display

1-2	Programming	10-14
4-5	• How to use Programming	10
6-9	• Example of Programming	10
6	• Overview of Programming	11
6	• Details of Programming	12-14
15-21	Technical Details	
15	• Specifications	15
16-17	• Interpreting Alerts	16-17
18	• How Radar Works	18
18	• How "POP" Works	18
19	• How Laser Works	19
20	• How TotalShield™ Technology Works	20
20-21	• How Safety Radar Works	20-21
22-28	Service	
22-23	• Troubleshooting	22-23
24	• Service	24
25	• Warranty	25
27-28	• Registration	27-28

Quick Reference Guide

Once your STi-R has been installed, just follow these simple steps

- 1 Press the PWR button, located on the left side of the controller, to turn the STi-R on/off. If installed to a switched accessory, the STi-R will turn on/off with the vehicle's ignition.
- 2 Press and hold the VOL/MUTE button to adjust the volume level.

Please read the manual to fully understand the STi-R's operation and features.


AutoMute

STi-R's patented AutoMute automatically reduces the volume level of the audio alert after a brief period. If you prefer, you can turn AutoMute off. *Page 6*

Programming

You can also easily change 9 features for your preferences. *Pages 12-14*

Power-on LED Indicator

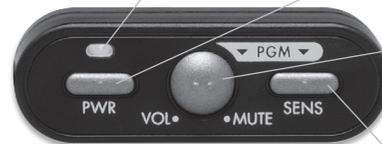

Control Module

Power

Press the PWR button to turn the STi-R on or off.

VOL/MUTE Button

Press and hold the VOL/MUTE button to adjust the alert volume level.

Briefly press this button to silence the audio for a specific alert. (The audio will alert you to the next encounter.) *Page 6*

Sensitivity Button (SENS)

Switches between Highway, AutoScan, City and City NoX settings. In general, we recommend the AutoScan mode. *Page 7*



Display Module

Alphanumeric Display

The STi-R's display will show Highway, AutoScan, City, or City NoX as its power-on indication. If you prefer, you can choose other power-on indications. *Pages 10-14*

During an alert, the display will indicate the radar or laser band, and a precise bar graph of signal strength. *Pages 8 and 13*

NOTE: In the Dark Mode the display will not light during an alert. *Pages 7, 14*

Photocell Light Sensor

XXXXXXXXXXXXXXXXXXXXXX

Power

To turn STi-R on or off, press the PWR button located on the front left side of the controller. When you turn STi-R on, it goes through a sequence of alerts.

If you prefer, you may program your STi-R for a shorter power-on sequence. See the Programming section for details.

Volume

Press and hold the VOL/MUTE button located in the center of the controller to adjust the STi-R's alert volume level. The audio will ramp up and down, accompanied by a bar-graph on the display. Once you've reached your preferred audio level, simply release the button.

To change the direction of the audio ramping (down instead of up or vice versa) simply release the VOL/MUTE button quickly press and hold it again to change its direction.

Power-on indication

After STi-R's start-up sequence is complete, the alphanumeric display will show Highway, AutoScan, City or City NoX to indicate which sensitivity mode is selected.

If you prefer, you can select alternate power-on displays. See the Programming section for details.

Voice Alerts

The STi-R provides digital voice announcements (factory default) for alerts.

If you prefer, you can turn off the voice announcement feature and have the STi-R provide audible tones without the voice announcement. See programming section for details.

AutoMute

Your STi-R has our patented AutoMute feature. After STi-R alerts you to a radar encounter at the volume you have selected, the AutoMute feature will automatically reduce the volume to a lower level. This keeps you informed without the annoyance of a continuous full-volume alert.

If you prefer, you can turn the AutoMute feature off. See the Programming section for details.

Mute

The VOL/MUTE button, located in the center of the STi-R's front panel, allows you to silence the audio alert during a radar encounter.

To mute the audio for a single specific signal, briefly press the VOL/MUTE button. After that radar encounter has passed, the mute will automatically reset and the audio will alert you to the next encounter.

Sensitivity Button (SENS)

The "SENS" button selects the STi-R's sensitivity mode. We recommend AutoScan mode for most driving.

Highway Mode (Highway)

In this setting, the STi-R will detect all signals at maximum range.

AutoScan Mode (AutoScan)

In this setting the STi-R's internal computer continuously analyzes all incoming signals and intelligently filters out unwanted X and K-band false alarms from automatic door openers and motion sensors. Full sensitivity is maintained on all other bands.

City (City STD)

In this setting, X and K-band sensitivity is further reduced to eliminate unwanted false alarms in congested urban areas.

City NoX (City NoX)

In this setting, K-band sensitivity is the same as City STD, however, X-band is completely turned off.

WARNING: Do not use the STi-R City NoX mode unless you are absolutely certain that there are no traffic radar guns using X-band in your area.

Brightness

The STi-R's brightness is controlled by a sensor located behind the display lens. This sensor will automatically adjust the display based on the ambient light in your vehicle. If you prefer, you can select a fixed brightness level, including Full Dark Mode. See the programming section for details.



Pilot (Power-on indication)

Pilot HWY (Full description)

In this setting, the STi-R will display “Highway,” “AutoScan,” “City,” or “CityNox” as its power-on indication. (factory default)

Pilot H (Letter)

In this setting, the STi-R will display “H” for Highway, “A” for AutoScan, “C” for City, and “Cnx” for City NoX.

Pilot V (Vehicle voltage)

In this setting, the STi-R will continually display “H” for Highway, A” for AutoScan, “C” for City, and “Cnx” for City NoX, and the vehicle’s voltage.

NOTE: A high or low voltage warning is given any time the vehicle’s voltage drops below 10.5 volts, or goes above 16.5 volts. This feature is always on, regardless of the Pilot setting.

Voice

Voice On (Voice announcements on)

In this setting, all radar, laser, and SWS messages (if programmed) will be announced using a digital voice.

Voice Off (Voice announcements off)

In this setting, only the distinct audio tone will be heard when a radar, Laser, or SWS message is detected.

Power-on Sequence

PwrOnSTD (Standard)

In this setting, each time you turn on the STi-R, it will display “Bel STi-R,” “LASER,” “Ka-band,” “K-band,” “X-band,” followed by a brief SWS alert. (factory default)

If any of the factory default bands have been disabled, a double X-band tone and corresponding message (i.e. “X OFF”), will alert you that one or more bands have been turned off.

PwrOnFST (Fast power-on)

In this setting, the STi-R will provide a single X-band tone if the factory default settings have not been changed. If any of the factory default band settings have been disabled, a double X-band tone and corresponding message (i.e. “X OFF”), will alert you that one or more bands have been turned off.

Signal Strength Meter



MeterSTD (Standard meter)

In this setting, the meter displays the band of the received signal, and a bar graph shows the relative signal strength. (factory default)



MeterTHT (Threat Display)

In this setting, the meter will simultaneously track multiple radar signals, including relative signal strength for each.



MeterTEC (Tech Display meter)

In this setting, the meter displays the actual numeric frequency of the radar signal received.

NOTE: The Tech Display feature is explained in more detail on page 9.

AutoMute

AutoMute ON (AutoMute on)

In this setting, the STi-R’s audio alerts will initially be at the volume you set, but after a few seconds, the STi-R will automatically reduce the volume level, to keep you informed, but not annoyed. (factory default)

AutoMute OFF (AutoMute off)

With AutoMute off, the STi-R’s audio alerts will remain at the volume you set for the duration of the radar encounter.

Brightness

BrtAuto

In this setting, the brightness for the display and backlit buttons are controlled automatically by a sensor that measures the ambient light in the vehicle. Sunlight will increase the brightness level, while dim or no light (night driving) will decrease the brightness.

BrtMin

In this setting, the display and backlit buttons are set to a minimum light level. This setting is retained in memory even if the power is turned off.

BrtMed

In this setting, the display and backlit buttons are set to a medium light level. This setting is retained in memory even if the power is turned off.

BrtMax

In this setting, the display and backlit buttons are set to a maximum light level. This setting is retained in memory even if the power is turned off.

BrtDark

In this setting, the display and backlit buttons will be totally dark.

Bands

BandsDFT

In this setting, the factory default settings for radar and laser are monitored.

This is the factory setting, and it is highly recommended that you use your STi-R in this mode.

BandsMOD

In this setting, STi-R will warn you with an audible alert, and associated text message stating which band has changed from the original factory setting (i.e. "SWS ON"). This warning is displayed during the start up sequence (standard or fast).

WARNING: Do not turn off a band unless you are absolutely certain that there are no traffic radar guns using that specific band in your area.

Features and Specifications

Operating Bands

- X-band 10.525 GHz \pm 25 MHz
- K-band 24.150 GHz \pm 100 MHz
- Ka-band 34.700 GHz \pm 1300 MHz
- Laser 904nm, \pm 33nm

Radar Receiver

- Dual-Horn Antenna Casting
- Superheterodyne, dual LNA's
- Scanning Frequency Discriminator
- Digital Signal Processing (DSP)

Laser Detection

- Quantum Limited Video Receiver
- (5) Optical Laser Sensors

Display Type

- 280 LED Alphanumeric
- Bar Graph, Threat Display™ or Tech Display™
- Automatic, plus 4 levels of fixed brightness including full Dark

Power Requirement

- 12VDC, Negative Ground

Programmable Features

- Power-On Indication
- Voice Alerts
- Power-On Sequence
- Signal Strength Meter
- AutoMute
- Display Brightness
- Bands

Sensitivity Control

- AutoScan
- Highway
- City
- CityNoX

Additional Patented Technology

- Auto Calibration Circuitry
- Mute/AutoMute™/SmartMute™
- TotalShield™ Technology

Patented Technology

STi-R is covered by one or more of the following:

U.S. patents

7,098,844 6,836,238 6,779,765 6,693,578
6,670,905 6,614,385 6,587,068 6,400,305
6,249,218 6,127,962 6,069,580 5,668,554
5,600,132 5,587,916 5,559,508 5,446,923
5,402,087 5,365,055 5,347,120 5,305,007
5,206,500 5,164,729 5,134,406 5,111,207
5,079,553 5,049,885 5,049,884 4,961,074
4,954,828 4,952,937 4,952,936 4,939,521
4,896,855 4,887,753 4,862,175 4,750,215
4,686,499 4,631,542 4,630,054 4,625,210
4,613,989 4,604,529 4,583,057 4,581,769
4,571,593 4,313,216 D314,178 D313,365
D310,167 D308,837 D296,771 D288,418
D253,752

Canadian Patents

2,337,077 2,330,964 1,295,715 1,295,714
1,187,602 1,187,586

European Patents

1,145,030 1,090,456
Other patents pending.

Interpreting Alerts

Although the STi-R has a comprehensive warning system and this handbook is as complete as we can make it, only experience will teach you what to expect from your STi-R and how to interpret what it tells you. The specific type of radar being used,

the type of transmission (continuous or instant-on) and the location of the radar source affect the radar alerts you receive.

The following examples will give you an introduction to understanding the STi-R's warning system for radar, laser and safety alerts.

Alert

Explanation

The STi-R begins to sound slowly, then the rate of alert increases. The Signal Meter ramps accordingly.

You are approaching a continuous radar source aimed in your direction.

STi-R emits short alerts for a few seconds and then falls silent only to briefly alert and fall silent again.

An instant-on radar source is being used ahead of you and out of your view.

STi-R suddenly sounds a continuous tone for the appropriate band received. All segments in the Signal Strength Meter are lit.

An instant-on radar source or laser source is being used nearby. This kind of alert requires immediate attention!

A brief laser alert.

Laser is being used in the area. Because laser is inherently difficult to detect, any laser alert may indicate a source very close by.

STi-R receives weak signals. These signals may be a little stronger as you pass large, roadside objects. The signals increase in frequency.

A moving patrol car with continuous radar is overtaking you from behind. Because these signals are reflected (reflections are increased by large objects), they may or may not eventually melt into a solid point even when the patrol car is directly behind you.

Alert

Explanation

STi-R alerts slowly for a while and then abruptly jumps to a strong alert.

You are approaching a radar unit concealed by a hill or an obstructed curve.

STi-R alerts intermittently. Rate and strength of alerts may be consistent or vary wildly.

A patrol car is traveling in front of you with a radar source aimed forward. Because signals are sometimes reflected off of large objects and sometimes not, the alerts may seem inconsistent.

STi-R alerts intermittently. Rate and strength of signal increases with each alert.

A patrol car is approaching from the other direction, sampling traffic with instant-on radar. Such alerts should be taken seriously.

STi-R gives an X-band or K-band alert intermittently.

You are driving through an area populated with radar motion sensors (door openers, burglar alarms, etc.). Since these transmitters are usually contained inside buildings or aimed toward OR away from you, they are typically not as strong or lasting as a real radar encounter.

CAUTION: Since the characteristics of these alerts may be similar to some of the preceding examples, over confidence in an unfamiliar area can be dangerous. Likewise, if an alert in a commonly traveled area is suddenly stronger or on a different band than usual, speed radar may be set up nearby.

How Radar Works

Traffic radar, which consists of microwaves, travels in straight lines and is easily reflected by objects such as cars, trucks, even guardrails and overpasses. Radar works by directing its microwave beam down the road. As your vehicle travels into range, the microwave beam bounces off your car, and the radar antenna looks for the reflections. Using the Doppler Principle, the radar equipment then calculates your speed by comparing the frequency of the reflection of your car to the original frequency of the beam sent out.

Traffic radar has limitations, the most significant of these being that it typically can monitor only one target at a time. If there is more than one vehicle within range, it is up to the radar operator to decide which target is producing the strongest reflection. Since the strength of the reflection is affected by both the size of the vehicle and its proximity to the antenna, it is difficult for the radar operator to determine if the signal is from a sports car nearby or a semi-truck several hundred feet away.

Radar range also depends on the power of the radar equipment itself. The strength of the radar unit's beam diminishes with distance. The farther the radar has to travel, the less energy it has for speed detection.

Because intrusion alarms and motion sensors often operate on the same frequency as X-Band or K-band radar, your STi-R will occasionally receive non-police radar signals. Since these transmitters are usually contained inside of a building, or aimed toward the ground, they will generally produce much weaker readings than will a true radar encounter. As you become familiar with the sources of these pseudo alarms in your daily driving, they will serve as confirmation that your STi-R's radar detection abilities are fully operational.

How "POP" Works

"POP" mode is a relatively new feature for radar gun manufacturers. It works by transmitting an extremely short burst, within the allocated band, to identify speeding vehicles in traffic. Once the target is identified, or "POPPED," the gun is then turned to its normal operating mode to provide a vehicle tracking history, (required by law).

How Laser (Lidar) Works

Laser speed detection is actually LIDAR (Light Detection and Ranging). LIDAR guns project a beam of invisible infrared light. The signal is a series of very short infrared light energy pulses, which move, in a straight line, reflecting off your car and returning to the gun. LIDAR uses these light pulses to measure the distance to a vehicle. Speed is then calculated by measuring how quickly these pulses are reflected given the known speed of light.

LIDAR (or laser) is a newer technology and is not as widespread as conventional radar, therefore, you may not encounter laser on a daily basis. And unlike radar detection, laser detection is not prone to false alarms. Because LIDAR transmits a much narrower beam than does radar, it is much more accurate in its ability to distinguish between targets and is also more difficult to detect. **AS A RESULT, EVEN THE BRIEFEST LASER ALERT SHOULD BE TAKEN SERIOUSLY.**

There are limitations to LIDAR equipment. LIDAR is much more sensitive to weather conditions than RADAR, and a LIDAR gun's range will be decreased by anything affecting visibility such as rain, fog, or smoke. A LIDAR gun cannot operate through glass and it must be stationary in order to get an accurate reading. Because LIDAR must have a clear line of sight and is subject to cosine error (an inaccuracy, which increases as the angle between the gun and the vehicle, increases) police typically use LIDAR equipment parallel to the road or from an overpass. LIDAR can be used day or night.

How TotalShield™ Technology Works

Beltronic's TotalShield Technology keeps RF signals from radiating from the detector. Unlike other radar and laser detectors, which merely move their RF signals (local oscillators) to another frequency (which will be detectable by future detector-detectors), this revolutionary design keeps you unseen by current radar detector-detectors, including VG-2 and Spectre. This unique design will also keep you unseen from any future radar detector detectors as well.

Although the BELTRONICS STi-R is a completely undetectable radar, laser and safety detector, driving techniques and reactions to alerts can still draw unwanted attention. Here are a few examples:

1. Hitting the brakes immediately when the STi-R provides an alert can broadcast use of a detector.
2. Traveling at night with a glow from a radar detector's display visible from outside your vehicle can also draw unwanted attention. The STi-R offers adjustable brightness, including a full dark mode which will provide audio alerts, but no visual indication.

How Safety Radar Works

Safety Warning System, or SWS, uses a modified K-band radar signal. The SWS safety radar system has 64 possible messages (60 currently allocated). The SWS messages your STi-R can display are listed on the facing page.

From the factory, your STi-R is programmed with SWS decoding OFF. If you wish to detect this system, use the Programming feature to turn STi-R's SWS decoding ON.

NOTE: Some of the safety messages have been condensed, so that each message can be displayed on one or two screens on STi-R's eight-character display.

Since Safety radar technology is relatively new, and the number of transmitters in operation is not yet widespread, you will not receive Safety signals on a daily basis. Do not be surprised if you encounter emergency vehicles, road hazards and railroad crossings that are unequipped with these transmitters. If Safety transmitters become more prevalent, these Safety radar signals will become more common.

SWS Text Messages

Highway Construction or Maintenance

- 1 WorkZone
- 2 Road Closed
- 3 Bridge Closed
- 4 WorkCrew Highway
- 5 WorkCrew Utility
- 6 Detour
- 7 Truck Detour
- 8 MustExit
- 9 Rtlane Closed
- 10 CntrLane Closed
- 11 LeftLane Closed
- 12 *Future use*

Highway Hazard Zone Advisory

- 13 Police
- 14 Train
- 15 Low Overpass
- 16 BridgeUp
- 17 Bridge Wt Limit
- 18 RockSlid Area
- 19 School Zone
- 20 Road Narrows
- 21 Sharp Curve
- 22 Crosswalk
- 23 Deer Crossing
- 24 Blind or Deaf Kid
- 25 SteepUse LowGear
- 26 Accident
- 27 PoorRoad Surface
- 28 Loading SchoolBus
- 29 DontPass
- 30 Dangrous Intrsect
- 31 Emergency Vehicle
- 32 *Future use*

Weather Related Hazards

- 33 HighWind
- 34 Severe Weather
- 35 HeavyFog
- 36 Flooding
- 37 BridgIce
- 38 RoadIce
- 39 Dust Blowing
- 40 Sand Blowing
- 41 Blinding Snow

Future use

Travel Information/Convenience

- 43 RestArea
- 44 RestArea w/servic
- 45 24hrFuel
- 46 Insp Stn Open
- 47 Insp Stn Closed
- 48 Reduced Speed
- 49 Speed Enforced
- 50 HazMatls Exit
- 51 Expect Delay
- 52 10 Min Delay
- 53 20 Min Delay
- 54 30 Min Delay
- 55 1 Hour Delay
- 56 Traffic TunRadio
- 57 Pay Toll
- 58 Trucks ExitRight
- 59 Trucks ExitLeft

Future use

Fast/Slow Moving Vehicles

- 61 Emerg Veh Moving
- 62 Police Pursuit
- 63 Oversize Vehicle
- 64 SloMoung Vehicle

Problem	Possible Cause
STi-R beeps briefly at the same location every day, but no radar source is in sight.	<ul style="list-style-type: none"> An X-band or K-band motion sensor or intrusion alarm is located within range of your route. With time, you will learn predictable patterns of these signals.
STi-R does not seem sensitive to radar or laser.	<ul style="list-style-type: none"> STi-R may be in City Mode.
STi-R did not alert when a police car was in view.	<ul style="list-style-type: none"> VASCAR (Visual Average Speed Computer and Recorder) a stopwatch method of speed detection, may be in use. Officer may not have radar or laser unit turned on.
STi-R did not provide a Safety signal while within range of an emergency vehicle.	<ul style="list-style-type: none"> Safety transmitters may not be commonly used in your area.
STi-R's display is not working.	<ul style="list-style-type: none"> Check programming to be sure the STi-R is not in Dark Mode.
STi-R's audible alerts are less loud after the first few alerts.	<ul style="list-style-type: none"> STi-R is in AutoMute Mode. See page 8 for details.
STi-R's power-on sequence reoccurs while you are driving.	<ul style="list-style-type: none"> A loose power connection can cause STi-R to be briefly disconnected.

Problem	Possible Cause
STi-R will not turn on.	<ul style="list-style-type: none"> Check the PWR is on. Check that vehicle ignition is ON.
Your 14-year old son has changed all 7 of the Programming options.	<ul style="list-style-type: none"> You can return all of the programming options to the factory defaults by holding down the VOL/MUTE and SENS buttons while you turn the STi-R on.

Explanation of Displays

<i>No display</i>	STi-R is in the Dark mode (pages 7, 14)
<i>PilotHWY</i>	One of the many programming messages (pages 10-14)
<i>WorkZone</i>	One of the many Safety Radar messages (pages 20-21)
<i>Caution</i>	STi-R has detected a Safety Radar Signal, but the signal isn't yet strong enough to decode the specific safety message (pages 20-21)
<i>Service Required</i>	STi-R has failed the calibration test. Contact Beltronics for repair

Service Procedure

If your STi-R ever needs service, please follow these simple steps:

- 1 Check the troubleshooting section of this manual. It may have a solution to your problem.
- 2 Contact your installing dealer. They will evaluate your unit and arrange repairs if necessary.

Parts

Replacement parts are available from your installing dealer.

BELTRONICS One Year Limited Warranty

BELTRONICS warrants your STi-R against all defects in materials and workmanship for a period of one (1) year from the date of the original purchase, subject to the following terms and conditions:

The sole responsibility of BELTRONICS under this Warranty is limited to either repair or, at the option of BELTRONICS, replacement of the STi-R detector. There are no expressed or implied warranties, including those of fitness for a particular purpose or merchantability, which extend beyond the face hereof. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply to you.

This warranty does not cover installation, removal or reinstallation charges. BELTRONICS is not liable for any incidental or consequential damages arising from the use, misuse, installation, or mounting of the STi-R. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

This Warranty gives you specific rights. You may have other legal rights which vary from state to state. This Warranty does not apply if the serial number on the housing of the STi-R has been removed, or if your STi-R has been subjected to physical abuse, improper installation, or modification.

beltronics
.com
www.
@
online:
Register

▼ *Remove card along perforations* ▼

BELTRONICS PRODUCT REGISTRATION CARD **BELTRONICS®**

- ▶ If you purchased your detector directly from BELTRONICS, you do not need to fill this out.
- ▶ If you did not purchase your detector directly from BELTRONICS, please fill out this section and return to us, or register online at our web address: **www.beltronics.com**.

1. First Name _____ Middle Initial _____ Last Name _____
 Address _____
 City _____ State _____ ZIP _____
 Phone Number (In case we have a question) _____
2. Product Purchased **BELTRONICS STI-R** Serial Number _____
3. Place of Purchase _____ Date _____ Price _____
4. Primary reason for purchasing this BELTRONICS product _____


STi_R

STEALTH INSTALLED

Remove card along perforations



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

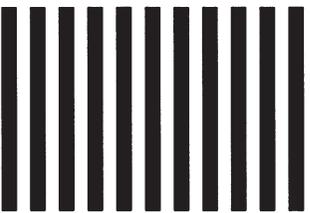

BUSINESS REPLY MAIL

FIRST-CLASS MAIL

PERMIT NO 300

WEST CHESTER OH

POSTAGE WILL BE PAID BY ADDRESSEE

ATTN CUSTOMER SERVICE
BELTRONICS INC
5442 WEST CHESTER RD
WEST CHESTER OH 45069-9789

